


VA2409M - 24" 1080P IPS 75HZ ADAPTIVE SYNC MONITOR WITH HDMI, VGA

Key Features

- 24 Inch Full HD (1920x1080p) IPS monitor with thin bezels and 75Hz refresh rate
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- VESA Adaptive Sync technology enables smooth frame rates to aid you in battle
- Optimized view settings offer "Game," "Movie," "Web," "Text," and "Mono" presets
- The VA2409M supports laptops, PCs, Macs and more with HDMI and VGA inputs



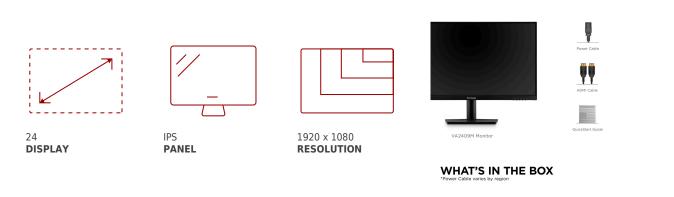

Product **Description**

Featuring enhanced wide-angle viewing, stunning resolution and flexible connectivity options, the ViewSonic® VA2409m monitor is a great addition

to any workspace. This 24" (23.6" viewable) VA2409m monitor comes with SuperClear[®] IPS panel technology so you can experience stunning brightness and contrast at nearly any viewing angle. With a minimalist edge-to-edge screen and a 3-sided frameless bezel, you can easily create a seamless multi-monitor setup. Connect laptops, PCs, gaming consoles and other multimedia devices using the HDMI port. And with powerful features like flicker-free technology and a blue light filter, you can work for longer with less strain. Enjoy a 3 year limited warranty, industryleading pixel performance policy and so much more with the ViewSonic VA2409m monitor.

Specifications

| UPC | 766907019247 |
|-----------------------------|---|
| Screen Size | 24 |
| Viewable Area (in.) | 23.6 |
| Panel Type | IPS |
| Display Resolution | 1920 x 1080 |
| Display Resolution | Full HD (1920x1080) |
| Static Contrast Ratio | 1,000:1 |
| Dynamic Contrast Ratio | 50,000,000:1 |
| Light Source | LED |
| Brightness | 250 cd/m2 |
| Colors | 16.7M |
| Color Space Support | 8 bit (6 bit + FRC) |
| Aspect Ratio | 16:9 |
| Response Time (Typical GTG) | 3ms |
| Viewing Angles | 178º horizontal, 178º vertical |
| Backlight Life (Hours) | 30,000 |
| Panel Surface | Anti-Glare type, Hard-coating (3H), Haze 25% |
| PC Resolution (max) | 1920 x 1080 |
| Mac® Resolution (max) | 1920 x 1080 |
| 3.5mm Audio Out | 1 |
| VGA | 1 |
| HDMI 1.4 In | 1 |
| Internal Speakers | 2W (x2) |
| Eco Mode (Conserve) | 17 |
| Eco Mode (optimized) | 19 |
| Consumption (typical) | 21 |
| Consumption (max) | 24 |
| Voltage | AC 100-240V (universal), 50-60Hz |
| Stand-by | 0.3 |
| Power Supply | External |
| Cable Organization | No |
| Kensington Lock Slot | 1 |
| Physical Controls | Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power) |
| On Screen Display | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |
| Temperature | 32-104º F (0 - 40º C) |
| Humidity (non-condensing) | 20-90% |

| VESA Compatible | 100 x 100 mm |
|------------------------------|--|
| Frequency Horizontal | VGA (24 ~ 86 KHz) HDMI 1.4 (24 ~ 86 KHz) |
| Frequency Vertical | VGA (48 ~ 75 Hz) HDMI 1.4 (48 ~ 75 Hz) |
| Tilt (Forward/Back) | 3° / 20° |
| Net (lbs) | 6.4 |
| Net Without Stand (lbs) | 5.6 |
| Gross (lbs) | 9.2 |
| Net (kg) | 2.9 |
| Net Without Stand (kg) | 2.5 |
| Gross (kg) | 4.2 |
| Packaging (in.) | 23.7" (W) x 16.1" (H) x 4.7" (D) |
| Physical (in.) | 21" (W) x 16.5" (H) x 7.4" (D) |
| Physical Without Stand (in.) | 21" (W) x 12.6" (H) x 2" (D) |
| Packaging (mm) | 602 mm (W) x 408 mm (H) x 120 mm (D) |
| Physical (mm) | 534 mm (W) x 419 mm (H) x 189 mm (D) |
| Physical Without Stand (mm) | 534 mm (W) x 321 mm (H) x 51 mm (D) |
| Regulations | cTUVus, FCC-B, ICES003, CEC, NOM, Mexico Energy |
| Package Contents | LCD Display, Power Cable, HDMI Cable, Quick Start Guide |
| Recycle/Disposal | Please dispose of in accordance with local, state or federal laws. |
| Warranty | Three-year limited warranty on parts, labor and backlight |
| UPC: 766907019247 | |





FULL HD (1920X1080P) RESOLUTION



FUTURE-PROOF CONNECTIVITY OPTIONS

Contact Sales <u>ViewSonic.com</u> 888.881.8781 email: salesinfo@viewsonic.com