

ViewSonic® LED DISPLAY VG2440


Key Features

- Ergonomic flexibility with quick-release stand
- vDisplay Manager productivity software for maximized multitasking
- Dual front-facing speakers for clear audio
- HDMI, DisplayPort, VGA, and USB3.2 ports for extended connectivity
- 3-Sided narrow bezel for uninterrupted viewing



Product Description

The ViewSonic VG2440 is a 24" Full HD ergonomic business monitor designed to increase productivity and efficiency within the home and office workspace. Providing the full spectrum of ergonomic flexibility, the VG2440 can tilt, swivel, pivot, and height adjust to adapt to any setup or workflow, while the built-in vDisplay Manager productivity software delivers efficient multi-tasking ability and streamlined display control. Dual front-facing speakers ensure a perfect audio-visual experience to provide teams with quality remote communication and collaboration. The beautifully designed display includes a 3-sided narrow bezel for uninterrupted viewing in multi-monitor display setups as well HDMI, DisplayPort, VGA, and USB3.2 connectivity. Complete with an easy-to-install quick release stand that reduces setup time to only a few minutes, the VG2440 offers a high-performance, purpose-built display solution designed for workspace productivity.

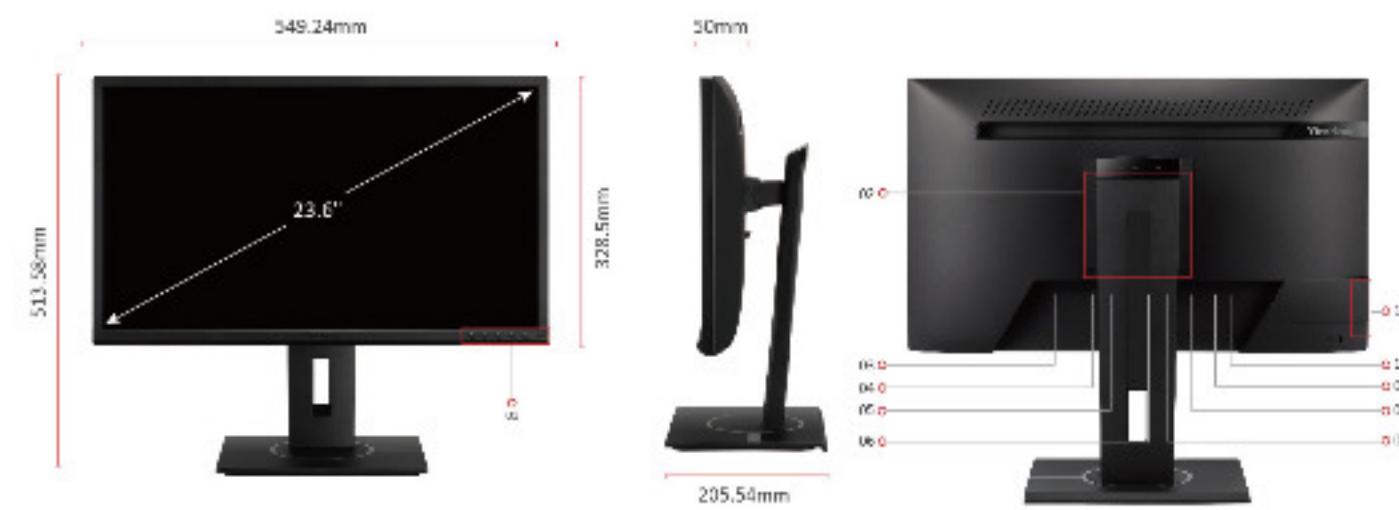

1. Menu Control Panel
2. VESA Compatible (Wall Mount: 100 x 100mm)
3. AC In
4. Line In
5. Headphone
6. Display Port 1,2
7. HDMI
8. D-Sub
9. USB 3.0 Up Stream (Type B)
10. USB 3.0 Down Stream (Type A)
11. USB 3.0 Down Stream (Type A)

Visit Us www.viewsonic.com

DISPLAY		COMPATIBILITY		POWER		INPUT SIGNAL		DIMENSIONS (IMPERIAL) (WXHXD)	
Display Size (in.):	24	PC Resolution (max):	1920x1080	Eco Mode (Conserve):	11.81W	Frequency Horizontal:	RGB Analog: 16 ~ 83KHz, HDMI (v1.4): 15 ~ 90KHz, DisplayPort (v1.2): 15 ~ 90KHz	Packaging (in.):	24 x 15.9 x 8.3
Viewable Area (in.):	23.6	Mac OS Resolution (max):	1920x1080	Eco Mode (optimized):	13.08W	Frequency Vertical:	RGB Analog: 50 ~ 75Hz, HDMI (v1.4): 49 ~ 75Hz, DisplayPort (v1.2): 49 ~ 75Hz	Physical (in.):	21.6 x 15.12 ~ 20.22 x 8.1
Panel Type:	VA Technology	PC Operating System:	Windows 7/8/8.1/10 certified; mac OS tested	Consumption (typical):	14.85W			Physical Without Stand (in.):	21.6 x 12.9 x 2
Resolution:	1920 x 1080	Mac OS Resolution (min):	1920x1080	Consumption (max):	16.24W				
Resolution Type:	FHD	CONNECTOR		Voltage:	AC 100-240V, 50/60 Hz	VIDEO INPUT		Packaging (mm):	609 x 405 x 210
Static Contrast Ratio:	3,000:1 (typ)	VGA:	1	Stand-by:	0.5W	Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)	Physical (mm):	549 x 384.07 ~ 513.58 x 206
Dynamic Contrast Ratio:	80M:1	USB 3.2 Type A Down Stream:	4	Power Supply:	Internal	Analog Sync:	Separate/Composite/SOG - RGB Analog	Physical Without Stand (mm):	549 x 329 x 50
Light Source:	LED	USB 3.2 Type B Up Stream:	1	ADDITIONAL HARDWARE		ERGONOMICS		GENERAL	
Brightness:	250 cd/m ² (typ)	3.5mm Audio In:	1	Kensington Lock Slot:	1	Height Adjust (mm):	130	Regulations: CTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 8.0, EAC, UkrSEPRO	
Colors:	16.7M	3.5mm Audio Out:	1	Cable Organization:	Yes	Swivel:	120°		
Color Space Support:	8 bit (6 bit + Hi-FRC)	HDMI 1.4:	1	CONTROLS		Tilt (Forward/Back):	-5° / 40°		
Aspect Ratio:	16:9	DisplayPort:	1	Physical Controls:	Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power)	Pivot (Right/Left):	90° / 90°	PACKAGE CONTENTS: VG2440 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Audio Cable (Male-Male) x1, Quick Start Guide x1	
Response Time (Typical GTG):	5ms	Power In:	3-pin Socket (IEC C14 / CEE22)	On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu	WEIGHT (IMPERIAL)			
Response Time (GTG w/OD):	5ms	AUDIO		OPERATING CONDITIONS		Net (lbs):	12.9		
Viewing Angles:	178° horizontal, 178° vertical	Internal Speakers:	2Watts x2	OPERATING CONDITIONS		Net Without Stand (lbs):	7.5	Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
Backlight Life (Hours):	30000 Hrs (Min)			Temperature:	32°F to 104°F (0°C to 40°C)	Gross (lbs):	18.7		
Curvature:	Flat			Humidity (non-condensing):	20% to 90%	WEIGHT (METRIC)			
Refresh Rate (Hz):	60			WALL MOUNT		Net (kg):	5.8	Warranty: *Warranty offered may differ from market to market	
Blue Light Filter:	Yes			VESA Compatible:	100 x 100 mm	Net Without Stand (kg):	3.4		
Flicker-Free:	Yes					Gross (kg):	8.5		
Color Gamut:	NTSC: 72% size (Typ), sRGB: 104% size (Typ)							Power Management: Energy Star standards, EPEAT	
Pixel Size:	0.272 mm (H) x 0.272 mm (V)								
Surface Treatment:	Anti-Glare, Hard Coating (3H)								