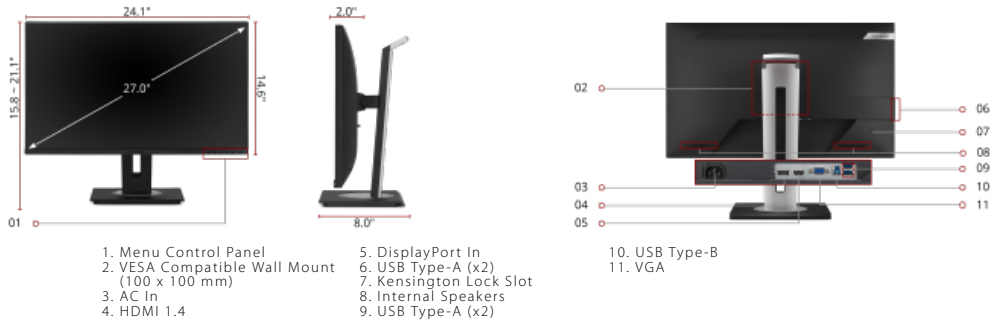## Key Features

ULTRA-WIDE VIEWING ANGLES | FRAMELESS DESIGN | A MORE COMFORTABLE WORKSPACE | ENVIRONMENTALLY FRIENDLY PACKAGING | CONVENIENT & VERSATILE STAND

Product Description

Designed for the modern day office, the ViewSonic® VG2748a monitor delivers an efficient end-to-end enterprise experience. Featuring SuperClear® IPS panel technology and 1080p resolution, this 27" monitor delivers crisp and clear images from nearly any viewing angle. The 3-sided thin bezel design provides a seamless viewing experience for multi-monitor setups. For enhanced productivity, an advanced ergonomic design offers a wide range of customizable adjustments for maximum comfort including pivot, swivel, height adjustment, and tilt. With the ability to tilt an impressive 40-degrees, the VG2748a is ideal for users who prefer to work while standing up, as well as for those who like to use their screen for group discussions. Versatile connectivity options include HDMI, DisplayPort, VGA, and USB. This monitor is also shipped in eco-friendly biodegradable packaging, along with an easy-to-install quick release stand that makes for simple out-of-the box setup. The quick release stand also includes an integrated client mount and cable management features, making this monitor perfect for deployment in cloud-based environments.

1. Menu Control Panel
2. VESA Compatible Wall Mount (100 x 100 mm)
3. AC In
4. HDMI 1.4
5. DisplayPort In
6. USB Type-A (x2)
7. Kensington Lock Slot
8. Internal Speakers
9. USB Type-A (x2)
10. USB Type-B
11. VGA

27"
DISPLAY

IPS
PANEL

1920 x 1080
RESOLUTION

Contact Sales

call: 888.881.8781

email: salesinfo@viewsonic.com

visit: viewsonic.com

Select your preferred Country/Region:

Display:

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS
Resolution:	1920 x 1080
Resolution Type:	Full HD (1920x1080)
Static Contrast Ratio:	1,000:1
Dynamic Contrast Ratio:	50,000,000:1
Light Source:	LED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	6 bit + A-FRC
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Viewing Angles:	178º horizontal, 178º vertical
Panel Surface:	Anti-Glare type, Hard-coating (3H), Haze 25%

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920x1080

Connector:

USB Type A(4), USB Type B(1), VGA(1), HDMI 1.4 In(1), DisplayPort(1)

Audio:

Internal Speakers:	2W (x2)

Power:

Eco Mode (Conserve):	20.5W
Eco Mode (optimized):	22.5W
Consumption (typical):	25.5W
Consumption (max):	58W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W
Power Supply:	Internal

Additional Hardware:

Kensington Lock Slot:	1

Controls:

Physical Controls:	Key 1 (eye), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

Operating Conditions:

Temperature:	32-104º F (0 - 40º C)
Humidity (non-condensing):	20-90%

Video Signal:

Frequency Horizontal:	HDMI (v1.4): 24 ~ 82KHz, DisplayPort: 15 ~ 82KHz
Frequency Vertical:	HDMI (v1.4): 50 ~ 75KHz, DisplayPort: 50 ~ 75KHz

Ergonomics:

Height Adjust:	130 mm / 5.1 in
Swivel:	120º
Pivot (Right/Left):	90º / 90º
Tilt (Forward/Back):	5º / 40º

Weight (imperial):

Net (lbs):	16.2
Net Without Stand (lbs):	10.9
Gross (lbs):	23.1

Weight (metric):

Net (kg):	7.3
Net Without Stand (kg):	4.9
Gross (kg):	10.5

Dimensions (imperial) (WxHxD):

Packaging (in.):	27.2 x 16.9 x 8.6
Physical (in.):	24.1 x 15.79~21.07 x 8.0
Physical Without Stand (in.):	24.1 x 14.6 x 2.0

Dimensions (metric) (WxHxD):

Packaging (mm):	692.0 x 430.0 x 218.0
Physical (mm):	612.0 x 401.2~533.2 x 202.0
Physical Without Stand (mm):	612.0 x 362.0 x 52.0

General:

Regulations: cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, NOM, Mexico Energy

PACKAGE CONTENTS: VG2748a Display, Power Cable, DisplayPort Cable, USB A/B Cable, Quick Start Guide

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907014709

Accessories:

CB-00008948, CB-00009950, CB-00010555, CB-00010684, CB-00010958, LCD-CABLE-001, LCD-CMK-001, LCD-DMA-002, VSPF2700, cb-00011486

Select your preferred Country/Region: