


VPC2C-W33-O1-1B

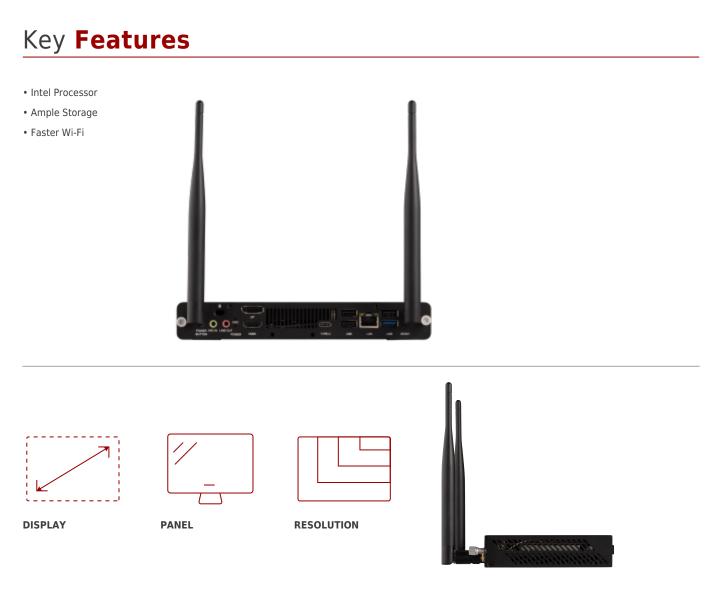

Product **Description**

The ViewSonic® VPC2C-W33-O1-1B slot-in PC delivers smart whiteboard and smart meeting room functionality for ViewSonic ViewBoard® interactive

displays. This slot-in PC module easily plugs into compatible displays and supports high-definition audio and video. With a powerful Intel[®] i5 processor, and fast SSD, the VPC2C-W33-O1-1B provides the computing power needed for fast-moving educational or corporate environments. Flexible connectivity options include HDMI, VGA, USB 2.0, 3.0 and Type C ports, as well as Giga LAN RJ45 and integrated WiFi 6 connection.

Specifications

MO

Media Player Type

Slot-in PC

More Information

CPU Processor Type	Intel® Celeron™ G5900T
CPU Processor Speed	Base Frequency: 3.2GHz
Cache	2MB
Cores	2
Threads	2
Operating System	Windows® 10 Pro
SECURITY	Secure Boot
Real-time Clock (RTC)	No
W3C SMIL	No
HTML5, JavaScript and CSS	No
Graphic Chipset	Intel UHD Graphics 610
RAM	8GB
Memory Type	DDR4 2666
Ethernet LAN	10/100/1000 Gigabit Ethernet
Wifi	Wireless AX200 WIFI 6
Bluetooth	Bluetooth 5.2
Storage Capacity	256GB
Storage Type	M.2 NVMe
HDMI 2.0 Out	1
HDMI 2.0 Out DisplayPort	1 1
DisplayPort	1
DisplayPort Ethernet LAN (RJ45)	1
DisplayPort Ethernet LAN (RJ45) USB 2.0	1 1 3
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0	1 3 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C	1 1 3 1 1 1 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out	1 1 3 1 1 1 1 1 1 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In	1 1 3 1 1 1 1 1 1 1 1 1 1 1 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage	1 1 3 1 1 1 1 1 DC in +12V ~ +19V @ 3.42A, 65W
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply	1 1 3 1 <td< th=""></td<>
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply Temperature	1 1 3 1 1 1 1 1 1 DC in +12V ~ +19V @ 3.42A, 65W Internal 23-113°F (-5-45° C)
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply Temperature Humidity (non-condensing)	1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply Temperature Humidity (non-condensing) Physical (in.)	1 1 3 3 1 1 1 1 1 1 1 1 1 1 1 1 1
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply Temperature Humidity (non-condensing) Physical (in.)	1 1 3 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
DisplayPort Ethernet LAN (RJ45) USB 2.0 USB 3.0 USB Type C Line Out 3.5mm Mic In Voltage Power Supply Temperature Humidity (non-condensing) Physical (in.) Packaging (in.)	1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1

Net (kg)	1.0
Gross (kg)	1.2
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Regulations	cTUVus, FCC-B w/ ICES003, FCC ID+SDOC, CA IC, IC VOC, NOM, COFETEL, CE EMC, CE RED, CE LVD, CB, RoHS, REACH, WEEE, BSMI, NCC, BIS, WPC, RCM, MIC, VCCI, VNTA, CCC, SRRC
PACKAGE CONTENTS	VPC2C-W33-O1-1B, Quick start guide
Warranty	One-year limited warranty







Contact Sales <u>ViewSonic.com</u>

888.881.8781 email: salesinfo@viewsonic.com