


VX2767U-2K - 27" 2K QHD THIN-BEZEL IPS MONITOR WITH USB-C, HDMI, AND DISPLAYPORT

Key Features

- 27-inch QHD (2560x1440p) IPS monitor with thin bezels and 75Hz refresh rate
- USB-C connectivity for fast data, audio and video transfer, and 65W charging over one cable
- HDR10 content support for deep contrast, rich color, and vibrant details
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- The VX2767u-2k supports laptops, PCs, and Macs with USB-C, HDMI, and DisplayPort inputs



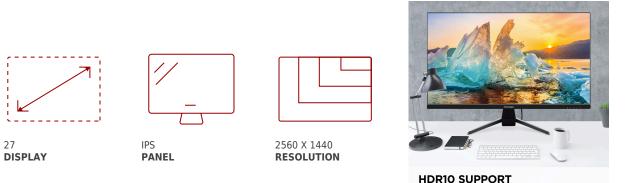

Incredible range of color and contrast

Product **Description**

Designed for the modern-day home office, the ViewSonic® VX2767u-2k is a 27" Quad HD IPS monitor that combines style with optimal versatility and functionality. With a 3-sided frameless design, this monitor provides a near-seamless viewing experience ideal for multi-monitor setups. The latest USB 3.2 Type-C connectivity delivers 65W charging power, video, and audio over a single cable, while HDMI and DisplayPort inputs keep you connected to your favorite devices. Moreover, HDR10 content support delivers vivid colors and brightness that exceed standard monitors.

Specifications

Screen Size

27

More Information

Viewable Area (in.)	27
Panel Type	IPS
Display Resolution	2560 x 1440
Display Resolution	QHD (2560x1440)
Static Contrast Ratio	1,000:1
Dynamic Contrast Ratio	50,000,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Color Space Support	8 bit
Aspect Ratio	16:9
Response Time (Typical GTG)	4ms
Response Time (MPRT)	1ms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
PC Resolution (max)	2560 X 1440
Mac® Resolution (max)	2560 X 1440
USB Type C	1
3.5mm Audio Out	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	2.5W (x2)
Eco Mode (Conserve)	16W
Eco Mode (optimized)	18W
Consumption (typical)	21W
Consumption (max)	26W
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5W
Power Supply	Internal
Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%

VESA Compatible	100 x 100 mm
Frequency Horizontal	HDMI (v1.4): 24 ~ 113 KHz, DisplayPort: 24 ~ 113 KHz, USB-C: 24 ~ 113 KHz
Frequency Vertical	HDMI (v1.4): 48 ~ 75 Hz, DisplayPort: 48 ~ 75 Hz, USB-C: 48 ~ 75 Hz
Tilt (Forward/Back)	5º / 20º
Net (lbs)	11.7
Net Without Stand (lbs)	10.4
Gross (lbs)	13.9
Net (kg)	5.3
Net Without Stand (kg)	4.7
Gross (kg)	6.3
Packaging (in.)	27.6 x 18.1 x 4.6
Physical (in.)	24.2 × 17.2 × 8.7
Physical Without Stand (in.)	24.2 x 14.4 x 2.1
Packaging (mm)	701.0 x 461.0 x 118.0
Physical (mm)	614.0 x 436.0 x 222.0
Physical Without Stand (mm)	614.0 x 366.0 x 53.0
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, CEC, NOM, Mexico Energy
PACKAGE CONTENTS	VX2767U-2K Display, Power Cable, USB-C Cable, HDMI Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
UPC: 766907021028	



LESS CLUTTER. GREATER EFFICIENCY. One cable solution with USB-C





Contact Sales <u>ViewSonic.com</u> 888.881.8781 email: salesinfo@viewsonic.com