NovoConnect
NC-X910

Streamline workspace
communications and collaborations
with this versatile 2-in-1 solution

Overview

NovoConnect NC-X910 offers a powerful combination
of digital signage (NovoDS) and wireless presentation
capabilities, making it an excellent choice for communication
and collaboration in corporate environments. The digital
signage functionality features a wide range of content
options and a highly intuitive Cloud service, making
content creation and distribution a breeze, streamlining
the process of engaging your audience. The wireless
presentation functionality enables 4 users to share content
simultaneously, fostering collaborative productivity
with features like real-time mirroring, extended desktop
functionality, and easy file sharing.

Key Features

Wireless Presentation

· Screen Mirroring: Airplay, Google Cast, & Miracast

· Windows | MacOS | Chromebook | Ubuntu

· Extended desktop

· File & video sharing

Extended screen
(serve as the secondary screen to User's laptop)

Primary screen
(User's laptop)

NovoConnect software | AirPlay | Google Cast

Screen Mirroring

Extended Desktop

Digital Signage

· Built-in NovoDS software easy to deliver the content

· Organize digital signage content through Novo DS Cloud and NovoDS Studio

· Dynamic content type: YouTube, Instagram, Google drive

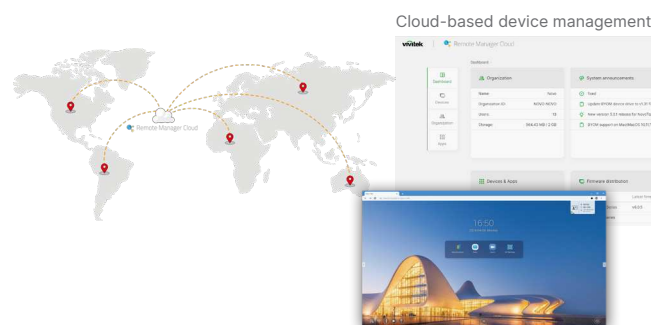· Cloud-based content management: two-factor authentication

BYOM

BYOM (Bring Your Own Meeting) allows users to seamlessly connect their devices to in-room AV equipment (such as camera) via Wi-Fi, making meetings and presentations more convenient and productive.

Cloud-based Device Management

· Managing devices by groups

· Firmware update

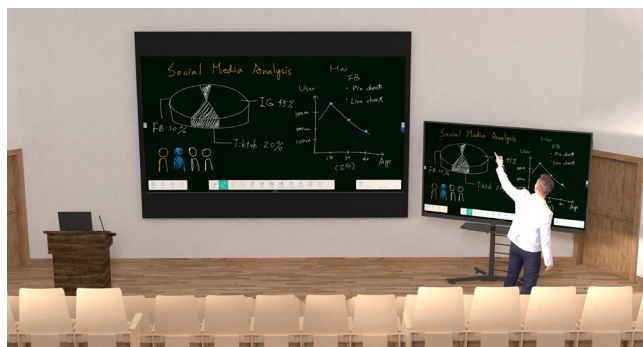· Remote assist – view and click on the device screen in the cloud

Cloud-based device management

Dashboard, Device snapshot & Remote control

NT Live

· Broadcast its screen content (as an "NT Live" source) to other display devices

· Receive screen broadcast from an "NT Live" source, such as a NovoTouch panel

System Integration

The SysControl network-based control protocol allows NovoConnect devices to be integrated with third-party control systems, enabling remote management and control of device functions, including power on/off, volume adjustment, and more.

Product Specifications-Hardware

Model	NC-X910
Storage	Internal: 32GB
	External: microSD Card (Up to 32GB), USB Drive (Up to 32GB)
Display Output	HDMI-Out v2.0 (HDCP v2.2 Compliant)
Display Resolution	3840 x 2160 (16:9, UHD 4K@60fps)
Display Orientation	Landscape & Portrait
Ethernet	RJ45 (10/100/1000 Mbps)
Wi-Fi	Wi-Fi: 802.11 b/g/n/ac (2.4GHz & 5GHz), 2T2R
Input Connection Ports	USB(x3)
	microSD Slot
HDMI-In	Yes
Audio Output	Audio-Out (3.5mm)
Dimensions (WxDxH)	96 x 178 x 28mm (3.8' x 7.0' x 1.10')
Weight	490g (17.3oz)
Power Supply	DC jack: 5V/2A, 10W

Product Specifications-Software

Software		NC-X910
OS Supported	Windows	Window 10+
	MacOS	MacOS 11+
	Android	Android 11+
	iOS	iOS 14+
	Chrome Book	O
Connection Method	Desktop Software	Windows & Mac
	Android/iOS App	Android/iOS
	Airplay	O
	GoogleCast	O
	Miracast	Windows 10+
Management Tool	Desktop Software	Windows
	Cloud Service	O
Build-in Apps	Google Play Store	O
	NT Live Screen	O
	NT Live Receiver	O

vivitek

A brand of **DELTA**