


# Right Angled HDMI Adapter HDMI Plug (Male) to HDMI Jack (Female)

EXP-HDMI-RTA

**WyreStorm**  
Essentials

## Specification Sheet

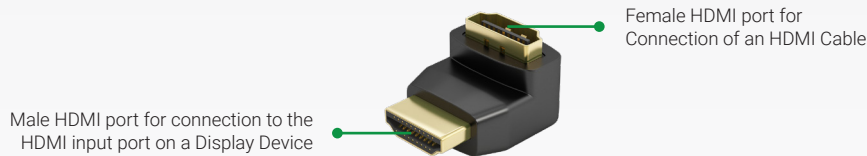

4K HDR 2160p 4:4:4 60 HDMI HDCP 2.2

WyreStorm - Powerful. Reliable. Simple.

### Introduction

The WyreStorm HDMI right angled adapter is designed to convert a straight HDMI cable into a 90-degree connection. Ideal for tight spaces like behind low profile flatscreen TV mounts, or in a tight cupboard space.

### Key Features

- Connects an HDMI cable to a display when space is limited
- Supports up to 4K@60 4:4:4 transmission
- Protects HDMI cable from damaging extreme bends


### In the Box

1x EXP-HDMI-RTA Right Angled Adapter

### Specifications

Audio and Video	
Input	1x HDMI: 19-pin type A Male
Output	1x HDMI: 19-pin type A Female
Output Video Encoding	Uncompressed
Encoding Data Rate	18 Gbps
End to End Latency	Zero
Audio Formats	2ch PCM   Multichannel: LPCM and Up to DTS-X and Dolby Atmos
Video Resolutions (Max)	1920x1080p @240Hz 8bit RGB 2560x1440p @120Hz 8bit RGB 4096x2160p @60Hz 10bit HDR 4:2:0 4096x2160p @60Hz 12bit HDR 4:2:2 4096x2160p @60Hz 10bit HDR 4:4:4 4096x2160p @60Hz 10bit RGB
Supported Standards	DCI   RGB   HDR   HDR10   Dolby Vision   HLG   BT.2020   BT.2100
Maximum Pixel Clock	600MHz
Communication and Control	
HDMI	TMDS   HDCP 2.2   EDID
Supported Functions	Ethernet   Audio Return Channel (ARC)   CEC   Auto Low Latency Mode (ALLM)   Variable Refresh Rate (VRR)
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C)   10% ~ 90%, non-condensing
Storage Temperature	-4°F to ~ 140°F (-20°C ~ +60°C)   10% ~ 90%, non-condensing
Maximum BTU	N/A
Dimensions and Weight	
Height	16.2mm/0.6in
Width	20.5mm/0.8in
Depth	29.9mm/1.2in
Weight	0.03kg/0.06lbs
Regulatory	
Safety and Emission	CE   FCC   RoHS   RCM   EAC

# Right Product for the Right Application.

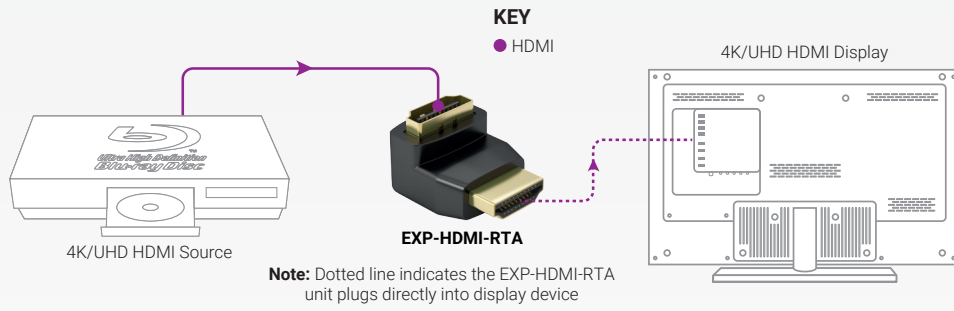

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.