

DESIGNER

LIFT

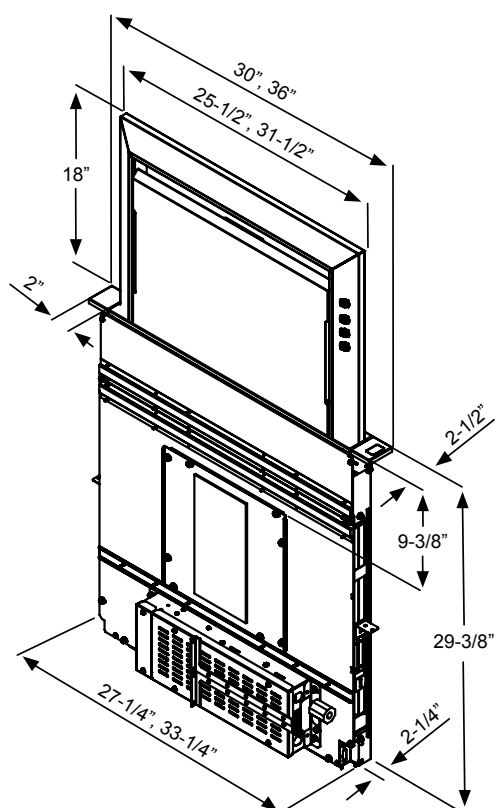
DOWNDRAFT

The Lift Downdraft is everything you want in a luxury ventilation system—power, performance, and good looks. Packed with perks like the dual-level BriteStrip™ LED lighting, Tri-Capture


Zones and 4-Way Ducting, the Lift is ready to help you rise to any occasion with the touch of a button.

ZEPHYR

ZEPHYRONLINE.COM



CUTOUT AND CLEARANCE DIMENSIONS

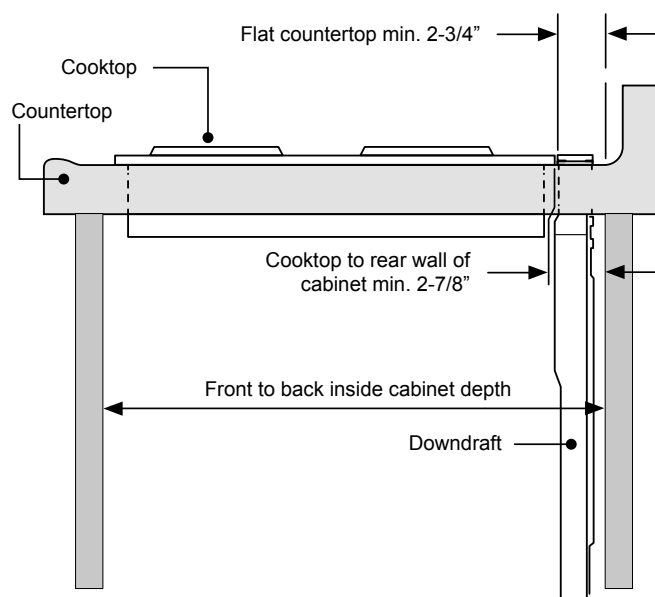

MODEL

Stainless Steel
SizeDLI-E30ASX
30"DLI-E36ASX
36"

PERFORMANCE

Internal/In-Line Blower (DBI-600A)*

200-600 CFM

200-600 CFM

In-Line Blower (PBN-1000A)*

500-1,000 CFM

500-1,000 CFM

External Blower (CBE-1000)*

500-1,000 CFM

500-1,000 CFM

FEATURES

Controls

Capacitive Touch

Capacitive Touch

Speed Levels

3

3

Auto On/Off**

Yes

Yes

Lighting

BriteStrip™ LED, x1

BriteStrip™ LED, x1

Dual-Level Lighting

Yes

Yes

Filters

Aluminum Mesh x2

Aluminum Mesh x2

Filter Clean Reminder

Yes

Yes

Tri-Capture Zones

Yes

Yes

4-Way Ducting

Yes

Yes

18" Chimney Rise

Yes

Yes

Recirculating Option

Yes

Yes

DUCT SPECIFICATIONS

Front Ducting

8"(DBI), 10"(PBN/CBE)

8"(DBI), 10"(PBN/CBE)

Left/Right Ducting

1-7/8" x 19" to 8"/10" round

1-7/8" x 19" to 8"/10" round

Rear Ducting

1-7/8" x 19" to 8"/10" round

1-7/8" x 19" to 8"/10" round

Bottom Ducting

1-7/8" x 19" to 8"/10" round

1-7/8" x 19" to 8"/10" round

AC POWER

Hood w/ DBI-600A

120V, 60Hz, Max. 3A

120V, 60Hz, Max. 3A

Hood w/ PBN-1000A

120V, 60Hz, Max. 4.4A

120V, 60Hz, Max. 4.4A

Hood w/ CBE-1000

120V, 60Hz, Max. 4.3A

120V, 60Hz, Max. 4.3A

OPTIONAL ACCESSORIES

Recirculating Kit

ZRC-00LF

ZRC-00LF

ADA Compliant Remote Up/Down Control

DDA-0002

DDA-0002

Gas Cooktop Seal Kit

DDS-0030

DDS-0036

Range Trim Kit

DDT-0030

DDT-0036

Electronics Extension Cable - 5'

11030132

11030132

End Cap Trim Extension +1"

DDE-0001

DDE-0001

Front Panel Rough-In Plate, 8" Round

54190053

54190053

Front Panel Rough-In Plate, 10" Round

54190054

54190054

1-7/8" x 19" to 8" Round Transition

AK00070

AK00070

1-7/8" x 19" to 10" Round Transition

AK00071

AK00071

1-7/8" x 19" Adapter for AK00080 Duct

AK00072

AK00072

1-7/8" x 19" Rectangular Duct, 2'

AK00080

AK00080

Make-Up Air Kit

MUA006A (600 CFM)

MUA006A (600 CFM)

MUA008A (1,000 CFM)

MUA008A (1,000 CFM)

WARRANTY

2 year parts, 1 year labor

2 year parts, 1 year labor

*Blower sold separately.

**Automatically turns on or off when raising or lowering the air vent.

COOKING APPLIANCE CONFIGURATIONS

Accommodate multiple cooking appliance combinations thanks to our 4-way ducting system.



Cooktop



Cooktop + Oven



Range Top



Range

4-WAY DUCTING

Gives you the flexibility to vent in multiple directions, compatible with all blower options.



Front Exhaust













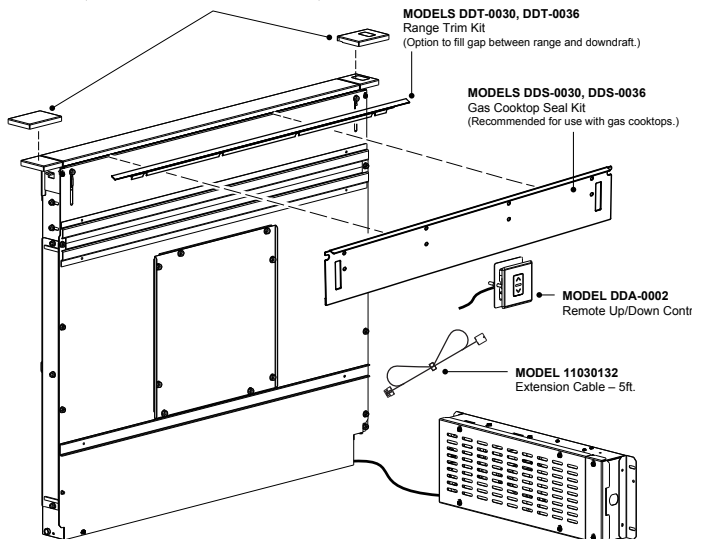

Side Exhaust



Rear Exhaust



Bottom Exhaust

OPTIONAL ACCESSORY	DESCRIPTION	OPTIONAL ACCESSORY	DESCRIPTION
Model DDA-0002 	Remote Up/Down Control Use when you cannot reach the UP/DOWN button on the downdraft chimney. Can be located on counter top, face of cabinetry or on the side cabinet of an island. Cut-out: 2-1/4"H x 2"W Cannot be used where remote control will interfere with cooking, where hot pans could be set, or where hot liquids could be spilled on the control. (Remote wiring connects with 6-pin connection.)	Model AK00070 	1-7/8" x 19" to 8" Round Transition Rectangular to 8" round transition for side, rear, or bottom exhaust when using DBI-600A Blower. Can be attached to downdraft unit or rectangular duct (AK00072).
Models DDS-0030, DDS-0036 	Gas Cooktop Seal Kit Recommended for use with all gas cooktops. Includes trim bracket and trim seal. 30", 36" widths	Model AK00071 	1-7/8" x 19" to 10" Round Transition Rectangular to 10" round transition for side, rear, or bottom exhaust when using external blower. Can be attached to downdraft unit or rectangular duct (AK00072).
Models DDT-0030, DDT-0036 	Range Trim Kit Use with free-standing range - where a gap is present between back of range and downdraft 30", 36" widths	Model AK00072 	Rectangular adapter for 1-7/8" x 19" Use to connect 1-7/8" x 19" rectangular duct directly to downdraft when using side or rear exhaust.
Model 11030132 	Extension Cable – 5ft. Use where electrical panel is remotely mounted. Extends electrical panel cable an additional 5 feet. Two can be connected to achieve 10ft.	Model 54190053 	Front Panel Rough-In Plate – 8" Round Use where 8" round duct or elbow attaches to front of airbox (model DBI-600A used as remote blower installation).
Model ZRC-00LF 	Non-Duct Recirculating Kit Use where ducting is not feasible or available. Mount to toe kick or base of a cabinet and attach directly to DBI-600A Blower using 8" round duct. Kit can be rotated so that the exhaust is not directly at your feet. Includes recirculating filter and decorative cover plate.	Model 54190054 	Front Panel Rough-In Plate – 10" Round Use where 10" round duct or elbow attaches to front of airbox (exterior or in-line blower installation).
Model DDE-0001 	End Cap Trim Extension +1" Width Use left and right to increase the overall trim width by 1".	MODEL DDE-0001 End Cap Trim Extensions (Increases trim width 1-inch to 31-, or 37-inches.) 	MODEL DDE-0001 End Cap Trim Extensions (Increases trim width 1-inch to 31-, or 37-inches.) MODELS DDT-0030, DDT-0036 Range Trim Kit (Option to fill gap between range and downdraft.) MODELS DDS-0030, DDS-0036 Gas Cooktop Seal Kit (Recommended for use with gas cooktops.) MODEL DDA-0002 Remote Up/Down Contr MODEL 11030132 Extension Cable – 5ft.
Model AK00080 	Rectangular Duct – 2-ft. Sections (1-7/8" x 19") Use to extend ducting when used in side, rear, or bottom exhaust. Can be cut down to size and multiple sections can be connected to each other. Galvanized steel construction.		