



HuddleCamHD Serial Joystick Controller

A 4th generation serial joystick controller with improved performance. Easily control your pan tilt zoom camera in various applications such as film-making, surveillance, live streaming, and more..

Model Number: HC-JOY-G4
<https://huddlecamhd.com/ptz-joystick/>

Features:


- RS232, RS485, RS422 wiring methods
- VISCA, Pelco-D, Pelco-P control protocol
- 7 Quick Camera Select
- Camera OSD Menu control
- Exposure and White Balance Mode Cycle buttons
- Focus Lock Toggle
- Iris, Shutter, Gain, Red Gain, & Blue Gain knobs
- Durable black metal housing
- Improved Buttons

What's in the Box:

- Joystick Controller
- RS232 Cable
- 12V DC Power Supply
- Quick Start Guide

Compatibility:

- VISCA, PELCO-D, PELCO-P
- PTZOptics and HuddleCamHD Cameras
- Other VISCA over IP Cameras

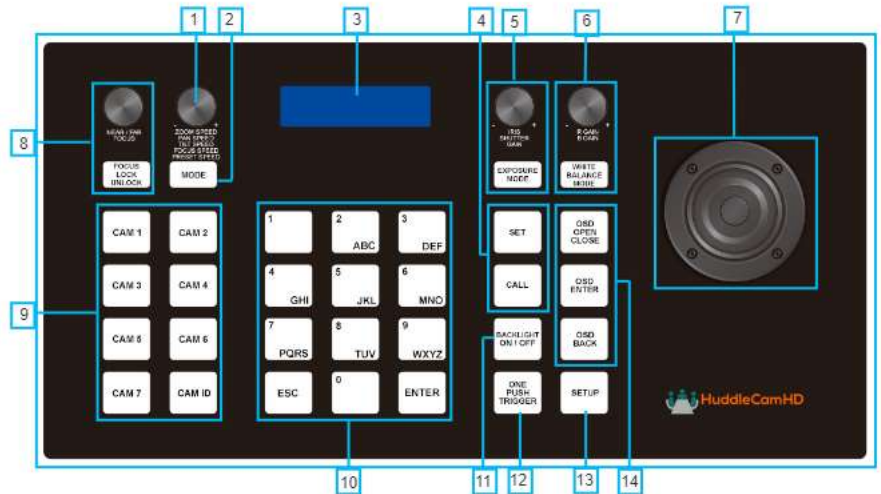

1. Speed Control Dial

Adjust Control Speeds

2. Mode Change Button

Basic & Matrix Modes

3. LCD Display

Displays Connection Info

4. Set & Call Presets

Set and/or Call Preset

5. Exposure Control

Exp Modes & Settings

6. White Balance Control

WB Modes & Settings

7. Joystick Controller

Pan, Tilt & Zoom

8. Focus Control

Adjust or Lock Focus

9. Camera Select

Select your camera

10. Numeric Buttons

Used for Presets

11. Backlight Toggle

Increase Backlight

12. OnePush Trigger

Calculate white level

13. Joystick Setup Menu

Enter Joystick Menu

14. Camera OSD

Adjust camera settings

Technical Specifications	
Connections	RS232, RS485, RS422
Maximum Cameras	Control up to 255 Cameras
Maximum Distance	3937' (1200m) 24 guage twisted pair
Other	
Warranty	2 Years

Operation Specifications	
Power	12V 2000mA DC
Working Temp.	32° F~ 131° F (0° ~ 55° C)
Working	10~ 90% (non-condensation)
Weight	3.4 lbs 1.6 kg
Dimensions (in.)	12.6W x 4.3H x 7.1D
Dimensions (mm)	320W x 110H x 180D