# DS-MBZ642L DS-MBZ647L DS-MBZ647P

Display size

DS-MBZ642L: 40"-42" DS-MBZ647L: 46"-65" DS-MBZ647P: 42"-65"



Max load 100lb (45.5kg)

### **Additional Features**

- ☑ Easy hang wall plate allows for a single person install
- The quick connect latch automatically engages the wall plate for a speedy setup
- ☑ Simple one-to-one ordering process
- Open wall plate reduces wall interference
- Included security hardware deters tampering and theft
- Accessory wall plates may be needed if connecting the wall plates to create a continuous mounting surface. Please see the Peerless-AV Menu Board Configurator at www.peerless-av.com for details
- DS-MBZ642L landscape configuration for 40"-42" displays with mounting hole patterns 880 x 400mm (34.65"W x 15.75"H)
- DS-MBZ647L landscape configuration for 46"-65" displays with mounting hole patterns 975 x 400mm (38.40"W x 15.75"H)
- DS-MBZ647P portrait configuration for 42"-65" displays with mounting hole patterns 550 x 400mm (21.65"W x 15.75"H)


# **SMART**MOUNT:

# Digital Menu Board Mount with Height & Depth Adjustment

FOR 40" TO 65" DISPLAYS

Peerless-AV's quick service restaurant (QSR) Menu Board Mount is designed to create a seamless mounting surface through connecting wall plates. Continuous and fixed tilt options allow all displays to be tilted at the same angle with ease, creating a flawless alignment. The QSR Menu Board Mount allows for tool-less height adjustment and four-corner depth adjustment to alleviate issues with wall imperfections and fine-tuning. The kickstand feature holds the bottom of the display away from the wall during cable connection, reducing installation time and cost. Available in landscape and portrait design options, Peerless-AV offers a one-to-one ordering process, making the QSR Menu Board Mount the perfect mounting solution.

The four-corner depth adjustment allows you to overcome wall imperfections so you can achieve the perfect QSR Menu Board.

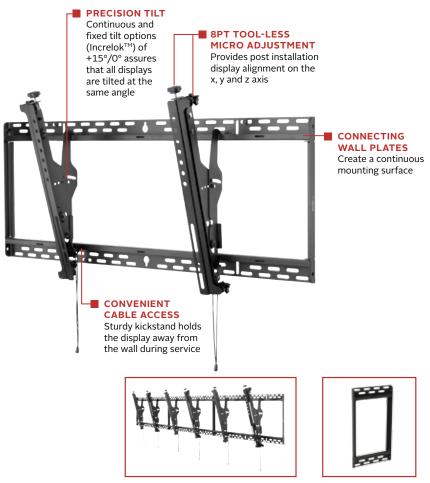

RoHS

Landscape digital menu board configuration for three displays

8" accessory wall plate for digital menu board configurations

DS-MBZ642L SmartMount® Digital Menu Board Mount with Height & Depth Adjustment for 40"-42" Displays - Landscape
DS-MBZ647L SmartMount® Digital Menu Board Mount with Height & Depth Adjustment for 46"-65" Displays - Landscape
DS-MBZ647P SmartMount® Digital Menu Board Mount with Height & Depth Adjustment for 42"-65" Displays - Portrait

# **Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-MBZ642L	36.23" x 19.48" x 3.09" (920 x 495 x 78mm)	10.5lb (4.8kg)			
DS-MBZ647L	39.98" x 19.48" x 3.09" (1015 x 495 x 78mm)	11lb (5kg)	100lb (45.5kg)	Matte/Flat	Black
DS-MBZ647P	23.23" x 19.48" x 3.09" (590 x 495 x 78mm)	9lb (4.1kg)			

# **Package Specifications**

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-MBZ642L	40.25" x 15.50" x 3.50" (1022 x 394 x 89mm)	12lb (5.4kg)	735029301028		
DS-MBZ647L	40.25" x 15.50" x 3.50" (1022 x 394 x 89mm)	13lb (5.9kg)	735029301035	Wall plate, adaptor rails and mounting hardware	1
DS-MBZ647P	26.88" x 18.00" x 4.38" (683 x 457 x 111mm)	11.5lb (5.2kg)	735029301042		


#### Accessories


ACC-MB0800: 8" accessory wall plate
ACC-MB2200: 22" accessory wall plate
ACC-MB3500: 35" accessory wall plate
ACC-MB3875: 38.75" accessory wall plate


All dimensions = inch (mm)

MAXIMUM VALUES								
MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"			
DS-MBZ642L	36.23"(920mm)	35.38"(899mm)	36.80"(935mm)	33"(838mm)	35"(889mm)			
DS-MBZ647L	39.98"(1015mm)	39.13"(994mm)	40.55"(1030mm)	36.75"(933mm)	38.75"(984mm)			
DS-MBZ647P	23.23"(590mm)	22.38(568mm)	23.80"(605mm)	20"(508mm)	22"(559mm)			


<sup>\*</sup>distances achieved by reversing brackets







WALL PLATE DETAIL



# **Architect Specifications**

The Smartmount® Digital Menu Board Mount with Height & Depth Adjustment shall be a Peerless-AV model DS-MBZ642L, DS-MBZ647L or DS-MBZ647P and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

#### Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

#### Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

#### Peerless-AV de México

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

