

ACC-MBF



Display size  
**40"-48"**



Max load  
**200lb (91kg)**

# Menu Board Mount Ceiling Attachment Accessory

FOR CONVERTING WALL MOUNTS TO CEILING

In keeping with our goal to ease the install and planning process for today's installer, Peerless-AV has developed the ACC-MBF Ceiling Menu Board Mount Accessory Bracket. This bracket is used in conjunction with the Peerless-AV's menu board wall mount models DS-MBX, DS-MBY and DS-MBZ. When unforeseen circumstances prevent mounting to the existing wall, the ACC-MBF quickly converts the wall mount to a ceiling mount, offering the flexibility needed to overcome any installation obstacles.

*The ACC-MBF's flexible design provides easy conversion of a wall mount to a ceiling mount while in the field.*



## Additional Features

- ✓ Converts existing DS-MBX/Y/Z wall mounts into ceiling mounts\*
- ✓ Can be used for 2x1 or 3x1 configurations (additional ACC-MBF needed for 3x1)
- ✓ Column and ceiling attachment sold separately

\* For portrait applications, the display must be at least 23" wide when turned to portrait

■ **CONVERSION KIT**  
Connects directly to DS-MBX, DS-MBY and DS-MXZ menu board wall mounts

■ **MULTIPLE CONFIGURATIONS**  
Can be combined with an additional ACC-MBF for 3x1 configurations



RoHS RECYCLED MADE IN USA

info@peerless-av.com  
peerless-av.com

peerless-AV®

**ACC-MBF** Menu Board Mount Ceiling Attachment Accessory


**Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
ACC-MBF	46.00" x 15.57" x 4.25" (1168 x 395 x 108mm)	21lb (9.5kg)	200lb (90.9kg)	Matte/Flat	Black

**Package Specifications**

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
ACC-MBF	47.00" x 18.00" x 6.00" (1194 x 457 x 152mm)	29lb (13.1kg)	735029303947	Frame, column attachment and assembly hardware	1

All dimensions = inch (mm)

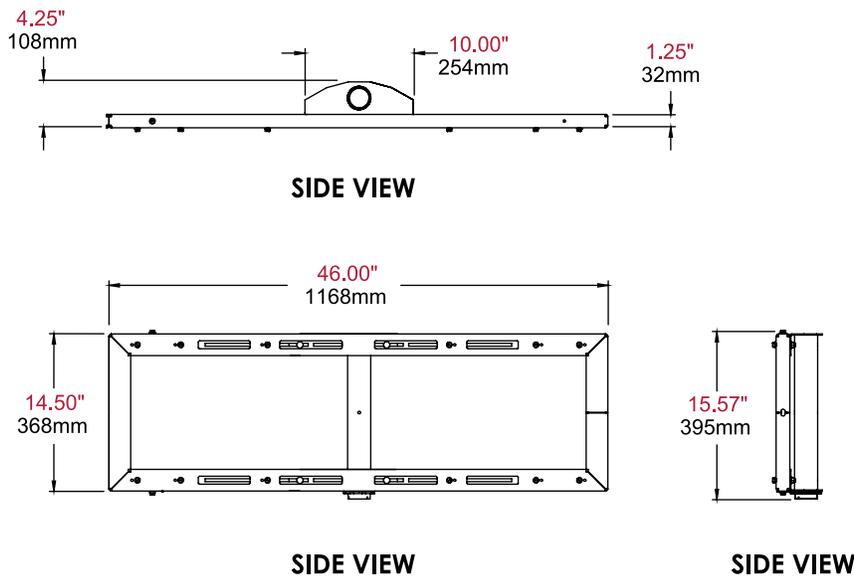

**Architect Specifications**

The Menu Board Mount Ceiling Attachment Accessory shall be a Peerless-AV model ACC-MBF and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit [peerless-av.com](http://peerless-av.com) to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

**Peerless-AV**  
2300 White Oak Circle  
Aurora, IL 60502 USA  
**(800) 865-2112**  
**(630) 375-5100**  
**Fax: (800) 359-6500**

**Peerless-AV Europe**  
Unit 3 Watford Interchange  
Colonial Way, Watford  
Herts, WD24 4WP  
United Kingdom  
**+44 (0) 1923 200100**  
**Fax: +44 (0) 1923 200101**

**Peerless-AV de México**  
Ave de las Industrias 413  
Parque Industrial Escobedo  
Escobedo, N.L.,  
Mexico 66050  
**+52 (81) 8384-8300**  
**Fax: +52 (81) 8384-8360**

