PADOVA


WALL

DESIGNER: FU-TUNG CHENG Inspired by Italy's timeless architectural aesthetic, the Padova invites your originality and vision. This new concept from Cheng is designed to be customized with the materials of your choice. So whether you prefer mosaic


tile, ribbed glass, or the many possibilities of Italian Marmorino plaster, you will have a hand in making Padova a signature addition to your home.






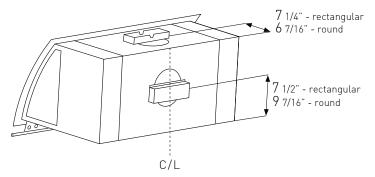

Duct Locations



Тор



Side



ZEPH'R ZEPHYRONLINE.COM

DESIGNER: FU-TUNG CHENG

MODEL Stainless Steel Size	CPA-E42ASX 42"	CPA-E48ASX 48"	CPA-E54ASX 54"			
PERFORMANCE Internal Blower (EBI-600B)*	240-600 CFM, 9 sones	240-600 CFM, 9 sones	240-600 CFM, 9 sones			
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA			
FEATURES						
Controls Electronic Touch Contro		Electronic Touch Controls	Electronic Touch Controls			
Speed Levels	3	3	3			
Auto Delay-Off	Yes	Yes	Yes			
Lighting Halogen, 50W x2		Halogen, 50W x2	Halogen, 50W x2			
Ambient Lighting	Incandescent, 40W x2	Incandescent, 40W x2	Incandescent, 40W x2			
Dual-Level Lighting	Yes, Halogen	Yes, Halogen	Yes, Halogen			
Filters	Professional Baffle	Professional Baffle	Professional Baffle			
Recirculating Option	No	No	No			
Extension Duct Cover	No	No	No			
CANOPY COLOR						
Stainless Steel	NA	CPC-0018	CPC-0015			
Brass	CPC-0112	CPC-0118	CPC-0115			
DUCT SPECIFICATIONS						
Vertical - Internal Blower	8″ Round	8" Round	8" Round			
Vertical - External/In-Line Blower	10" - 8"**	10" - 8"**	10" - 8"**			
Horizontal - Internal Blower	3-1/4" x 10"	3-1/4" x 10"	3-1/4" x 10"			
Horizontal - External/In-Line Blower	10" - 8"**	10" - 8"**	10" - 8"**			
AC BOWER						
AC POWER Hood w/ EBI-600B	120V, 60Hz, Max. 4.35A	120V, 60Hz, Max. 4.35A	120V, 60Hz, Max. 4.35A			
Hood w/ CBE-1000	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 4.33A			
	. 20 1/ 001.12/ 1110/11 010011		. 20 1, 00 1.2, 11 0100.			
OPTIONAL ACCESSORIES						
Make-Up Air Kit	MUA006A (600 CFM)	MUA006A (600 CFM)	MUA006A (600 CFM)			
	MUA008A (1,000CFM)	MUA008A (1,000CFM)	MUA008A (1,000CFM)			
MOUNTING HEIGHT RANGE***	28" - 36"	28" - 36"	28" - 36"			
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor			

CEILING HEIGHT		8′	8.5′	9′	9.5′	10′	10.5′	11′	12′
STANDARD DUCT COVER	Ducted Mounting Height***	28" - 30"	28" - 34"	NA	NA	NA	NA	NA	NA



^{*}Blower sold separately.

**10" round duct connects to external and in-line blowers. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.