



USB 2.0 A/B Cable

- Plug-and-Play for keyboards, mice, modems, printers, and other USB peripherals
- Transfer rate up to 480 Mbps
- Constructed with foil and braid shield to reduce EMI/RFI interference
- Twisted pair construction helps reduce crosstalk thus ensuring high-speed, error-free data transfer
- Available in various colors
- Lifetime Warranty

Specifications: USB 2.0 A/B Cable

Physical Characteristics:

Conductor 1 (x2)

| | |
|-------------|----------------------------|
| Material: | Stranded Tinned Copper |
| Size: | 28AWG (7/0.12 TC) |
| Insulation: | HD-PE |
| OD: | 0.90mm |
| Color: | White/Green (twisted pair) |

Conductor 2 (x2)

| | |
|-------------|------------------------|
| Material: | Stranded Tinned Copper |
| Size: | 24AWG (7/0.12 TC) |
| Insulation: | SR-PVC |
| OD: | 1.1mm |
| Color: | Red, Black |

Drain Wire

| | |
|-----------|-------------------|
| Material: | Tinned Copper |
| Size: | 28AWG (7/0.12 TC) |

Shield 1

| | |
|-----------|---------------------|
| Material: | Aluminum Mylar Wrap |
|-----------|---------------------|

Shield 2

| | |
|-----------|----------------|
| Material: | Braided Copper |
| Coverage: | 65% |

Jacket

| | |
|-----------|-------|
| Material: | PVC |
| OD: | 4.7mm |

USB 2.0 A Connector

| | |
|-------------------|---------------|
| Gender: | Male |
| Insulation: | White PBT |
| Contact Material: | Gold Flash |
| Shell Material: | Nickel Plated |

USB 2.0 B Connector

| | |
|-------------------|---------------|
| Gender: | Male |
| Insulation: | White PBT |
| Contact Material: | Gold Flash |
| Shell Material: | Nickel Plated |

Hood Type

Molded

Approvals:



RoHS Compliant

Warranty:

Lifetime

Package Type:

Polybag

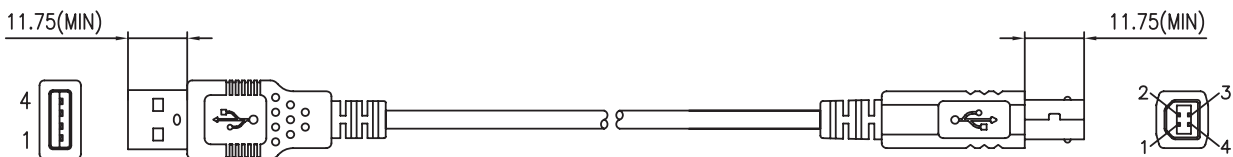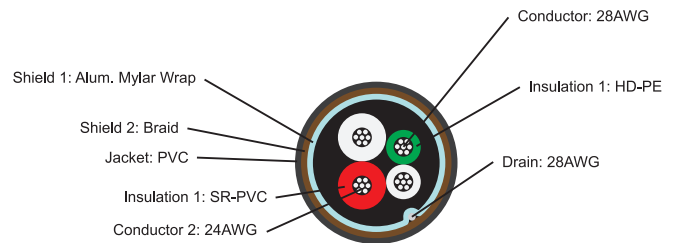

| | Black | White | Blue | Green | Orange | Purple | Weight (lbs.) |
|----------------------|-------|-------|-------|-------|--------|--------|---------------|
| 1m USB 2.0 A/B Cable | 28101 | 13171 | — | — | — | — | 0.13 |
| 2m USB 2.0 A/B Cable | 28102 | 13172 | 35674 | 35667 | 35668 | 35671 | 0.19 |
| 3m USB 2.0 A/B Cable | 28103 | 13400 | 35678 | 35669 | 35670 | 35675 | 0.28 |
| 5m USB 2.0 A/B Cable | 28104 | 13401 | — | — | — | — | 0.30 |