


XHB653



65" Xtreme™ High Bright Outdoor Display

There has never been an outdoor daylight readable display built to withstand the harsh outdoor elements like the Peerless-AV® Xtreme™ High Bright. Featuring an IP66 Rated design and a patented thermal exhaust system, Xtreme High Bright Outdoor Displays are fully protected against water, dust, moisture and even insects. The display's cover glass is optically bonded, which increases the perceived contrast ratio and cuts down on glare, providing amazing picture quality even in direct sunlight. With an operating temperature range of -31°F to 140°F, Xtreme Displays are designed to thrive year-round outside, without worry of extreme hot or cold temperature waves. This High Bright line of commercial displays offer 2500nits of luminance to combat high ambient lighting conditions, while the ambient light sensor automatically adjusts the display's brightness to optimize the power consumption and enhance the viewing experience. Providing unmatched capabilities, Xtreme High Bright Outdoor Displays are the perfect digital signage or entertainment solution for any professional application.

All Weather Rated (IP66)



Operating Temperature Range:

-31°F - 140°F
(-35°C - 60°C)

- Optically bonded, anti-reflective cover glass increases the perceived contrast ratio and cuts down on glare, providing amazing picture quality, even in direct sunlight
- Daylight readable with LED backlight and full HD 1080p resolution for a bright, crisp picture
- Includes Quarter Wave Plate polarizer, allowing for portrait and landscape installations
- Fully-sealed, rugged display designed for 24/7 operation in harsh environments year-round
- Remote and Local monitoring, supported via IP addressable user interface, for temperature, humidity, and power draw diagnostics of the display
- Anti-theft, Gyroscopic sensor can be set to specific degrees and tolerances, if the display is moved beyond the set figure an email and text will be sent to the registered user

■ AMBIENT LIGHT SENSOR

Automatically adjusts brightness to best match the lighting conditions, which optimizes the display's power consumption and enhances the viewing experience (optional ALS extender accessory available)

■ HIGH BRIGHT OUTPUT

Offers 2500nits of luminance to combat high ambient lighting conditions



■ FULLY-SEALED DESIGN

IP66 rating prevents the ingress of foreign materials, such as water, dust, moisture and insects, from entering the display

■ IK10, TEMPERED COVER GLASS

Protects the screen against vandalism and debris



■ PATENTED THERMAL EXHAUST SYSTEM

Keeps internal components properly cooled in extreme heat

■ VESA® MOUNTING PATTERN

Provides cost savings and flexibility in outdoor rated mount selection



XHB653 65" Xtreme™ High Bright Outdoor Display

LCD Display

SCREEN SIZE	65" Class (64.5" Diagonal)
ACTIVE SCREEN AREA	56.24" x 31.64" (1428.48 x 803.52mm)
PIXEL PITCH	.74 x .74mm
ASPECT RATIO	16:9
RESOLUTION	1920 x 1080
COLOR DEPTH	10Bit (1.07 Billion Colors)
BRIGHTNESS	2,500cd/m ²
COLOR GAMUT	72% NTSC
BACKLIGHT ADJUSTMENT	Automatic (Ambient Light Sensor)
CONTRAST RATIO	4000:1
VIEWING ANGLE	178° Vertical/Horizontal
DISPLAY ORIENTATION	Portrait/Landscape
BACKLIGHT	Direct LED
RESPONSE TIME	8ms (Gray to Gray)
REFRESH RATE	60Hz
OPERATING TIME	24/7

Display Features

Ambient Light Sensor, Auto Source Switching, Brightness Scheduling, Email Alerting, IP Control, Pixel Shift, Power Scheduling

Mechanical

SIZE (W x H x D)	58.68" x 34.08" x 5.14" (1491 x 866 x 131mm)
COLOR	Black
GLASS	IK10 Rated Heat Tempered Anti-Reflective Treatment Optically Bonded Quarter Wave Plate Polarizer
VESA® PATTERN	600 x 400mm 600 x 600mm
NET WEIGHT	154lb (69.85kg)

Power

AC INPUT	100 VAC to 240 VAC, 50 to 60 Hz
POWER CONSUMPTION	Typical: 297.5W Maximum: 335.2W
STAND BY POWER	Passive Standby = <0.5W Active Standby = <3.0W

Input/Output Connections

ATSC TUNER MODULE PORT	(for future use) (x1)
HDMI INPUT	HDMI (x2) 480i ~ 1080p CEC: HDMI 1, 2 ARC: HDMI 2
CVBS INPUT	3.5mm (x1) 480i
DISPLAYPORT INPUT	DP (x1) 480i ~ 1080p
ANALOG AUDIO OUTPUT	3.5mm Headphone Jack (x1)
DIGITAL AUDIO OUTPUT	Optical (x1)
USB DATA INPUT	USB 2.0 (x1) Multimedia Software Upgrade
RS232 INPUT	3.5mm TRS Jack (x1)
RS232 OUTPUT	(for future use)(x1)
12VDC 2.5A OUTPUT	5.5mm (x1)
USB POWER 5VDC 2.4A OUTPUT	USB (x1)
IR EXTENDER INPUT	3.5mm (x1)
IR REPEATER OUTPUT	3.5mm (x1)
AMBIENT LIGHT SENSOR EXTENDER INPUT	3.5mm (x1)
LAN INPUT	RJ-45 (x1)

Environmental


OPERATING TEMPERATURE	-31°F - 140°F (-35°C - 60°C)
IP RATING	IP66
REGULATORY	FCC Class A, cULus, CE, UKCA

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
XHB653	68.00" x 45.00" x 32.00" (1727 x 1143 x 813mm)	204.4lb (92.71kg)	735029345794	Display, Waterproof Universal Remote Control, User's Guide, 3mm Hex Wrench, Power Cord, IR Extender	1

Accessories

ACCD-05K:	5 Volt Accessory Kit	EPT650:	Outdoor Universal Tilt Wall Mount, Landscape
ACCD-12K:	12 Volt Accessory Kit	ESA763PU:	Outdoor Articulating Wall Mount, Landscape
ACCD-ALG:	Analog Accessory Kit	ESF686:	Outdoor Flat Wall Mount
ACCD-ALS:	Ambient Light Sensor Extender	EWMU:	Wind Rated Wall Mount, Landscape

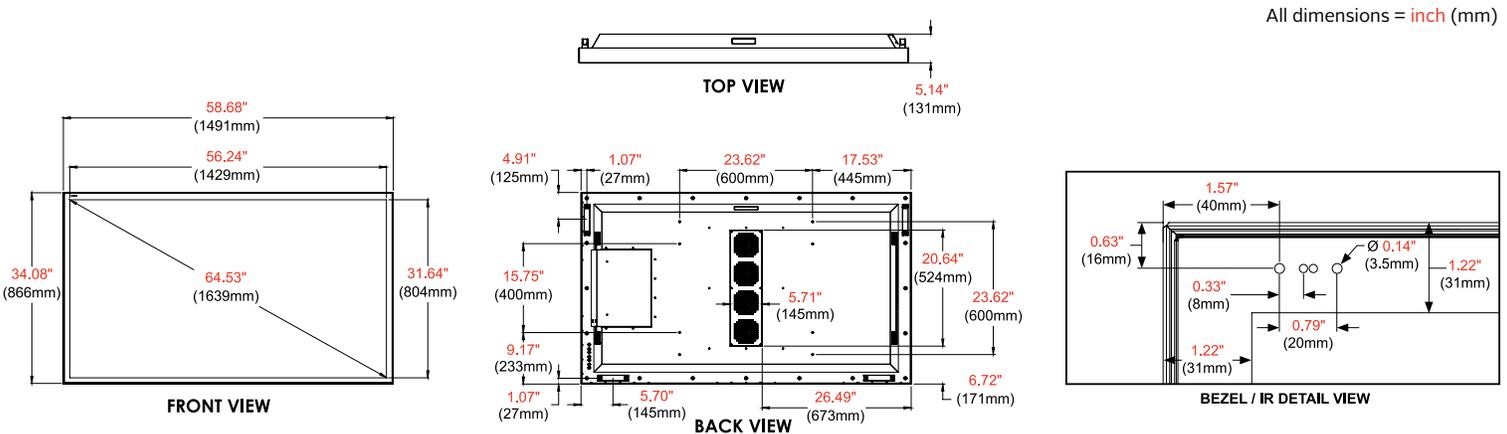

Architect Specifications

The Xtreme™ High Bright Outdoor Display shall be a Peerless-AV model XHB653 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

