

## Overview

---

Signal processor at the heart of the ADECIA, Yamaha's Complete and Customizable Communications Solutions.



Rear Panel

## Features

---

- Up to 2 RM-CG and 2 VXL1B-16P can be connected via PoE switch SWR2311P-10G
- Automatically recognizes connected devices on the same network for audio routing
- Equipped with the Auto Tuning functions that automatically measure and provide the optimum sound settings for the environment
- Equipped with the Auto Mixer functions that automatically optimizes the mixing balance of audio input via Dante
- Equipped with various input/output connections such as USB, VoIP, analog, and Bluetooth
- Standard network audio support for "Dante"; all compatible devices can be connected with single network cable

## Specifications

### General Specifications

Description	Remote Conference Processor	
Dimensions (W x D x H)	215mm x 260mm x 44mm	
Weight	1.6kg	
Power Requirements	PoE+ (IEEE 802.3at, LLDP, DC 48V)	
Maximum Power Consumption	15.0W	
In Operation	Temperature	0°C - 40°C
	Humidity	30% - 90% (no condensation)
Storage	Temperature	-20°C - 60°C
	Humidity	20% - 90% (no condensation)
Indicator	Power Indicator, Status Indicator, Bluetooth Indicator, Network Port Indicator x 3	
Accessories	Installation manual, USB cable (A-B) 5m (16.4ft), USB cable (A-microB) 1m (3.3ft), Rubber foot x 4, Access panel	
Options	RM-MTL: Table Mount Kit, RM-MRK: Rack Mount Kit	

### Input/Output Characteristics

Input Terminal	Input Level	Connector
	Nominal	
MIC IN 1,2	-46dBu	XLR-3-31 type (Balanced, 2pin hot)
AUX IN L,R	-14dBV	RCA Pin

Output Terminal	Source Impedance	Output Level		Connector
		Nominal	Max. before Clip	
AUX OUT L,R	1kΩ	-14dBV	+6dBV	RCA Pin
SP OUT L,R	1kΩ	-14dBV	+6dBV	RCA Pin

### Network Specifications


Ethernet Port 1 (Dante)	Dante, Remote Control, Web UI, PoE+
Ethernet Port 2/3 (Corporate)	Corporate Network, Remote Control, SIP, Web UI
USB Network (Front)	USB2.0, Network Class: WebUI, Fixed IP
Cable Requirements	Ethernet port 1/2/3 : CAT5e or higher (STP) Front USB port: USB Cable (A-microB type)

### Audio Specifications

Frequency Response	20Hz - 20kHz	
Sampling Rate	48kHz	
Bit Depth	24bit	
Latency	8 ms (Dante In to USB Out, includes signal processing)	
Audio I/O	Dante	16in x 16out
	USB	USB2.0. Audio Class 1.0, Input: 2ch, Output: 2ch @48kHz
	Microphone Input	XLR Balanced, Input: 2ch
	AUX	RCA Unbalanced (Line Level), Input: 2ch, Output: 2ch
	Speaker Out	RCA Unbalanced (Line Level), Output: 2ch
	Bluetooth	Version 4.2 Supported Profiles: HFP (1.6), A2DP, AVRCP Supported Codec: CVSD, SBC, mSBC Wireless Output: Class2 Maximum Communication Distance: 10m (32.8ft) (no obstacles) Radio Frequency (Operational Frequency): 2,402MHz to 2,480MHz Maximum Output Power (EIRP): 4.0dBm (2.5mW)
	SIP	Call Handling: Dial, Answer, Hold, Resume, Forwarding, Do not disturb, Call ID, Voice Mail Notifications (switch configured) Call Bridging: Supports bridging SIP, USB, BT and AUX calls. Join, Split, Hold, Resume, 5+1 lines: Up to 2 SIP calls, 1 USB call, 1 Bluetooth call, 1 AUX, Plus the user Codecs: G.711, G.722HD, G.729ab, G.726 DTMF Support: RTP event, SIP in-band, SIP info package Security: SRTP Support (RFC 1889), IETF SIP support (RFC 3261 and companion RFCs)

## Dimensions


Unit: mm (inch)

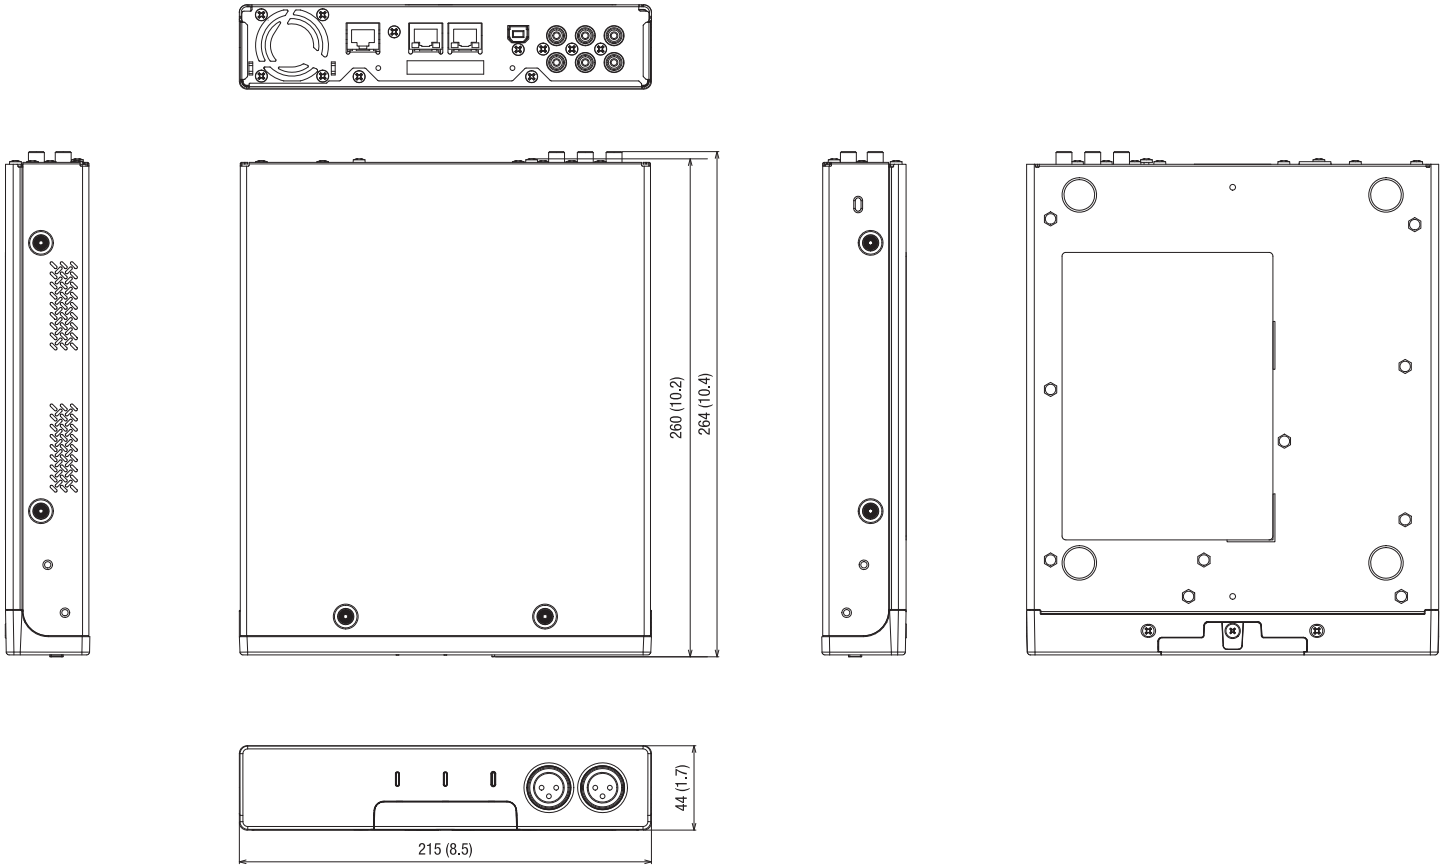

## Options

- Rack Mount Kit RM-MRK
- Table Mount Kit RM-MTL

# Block Diagrams

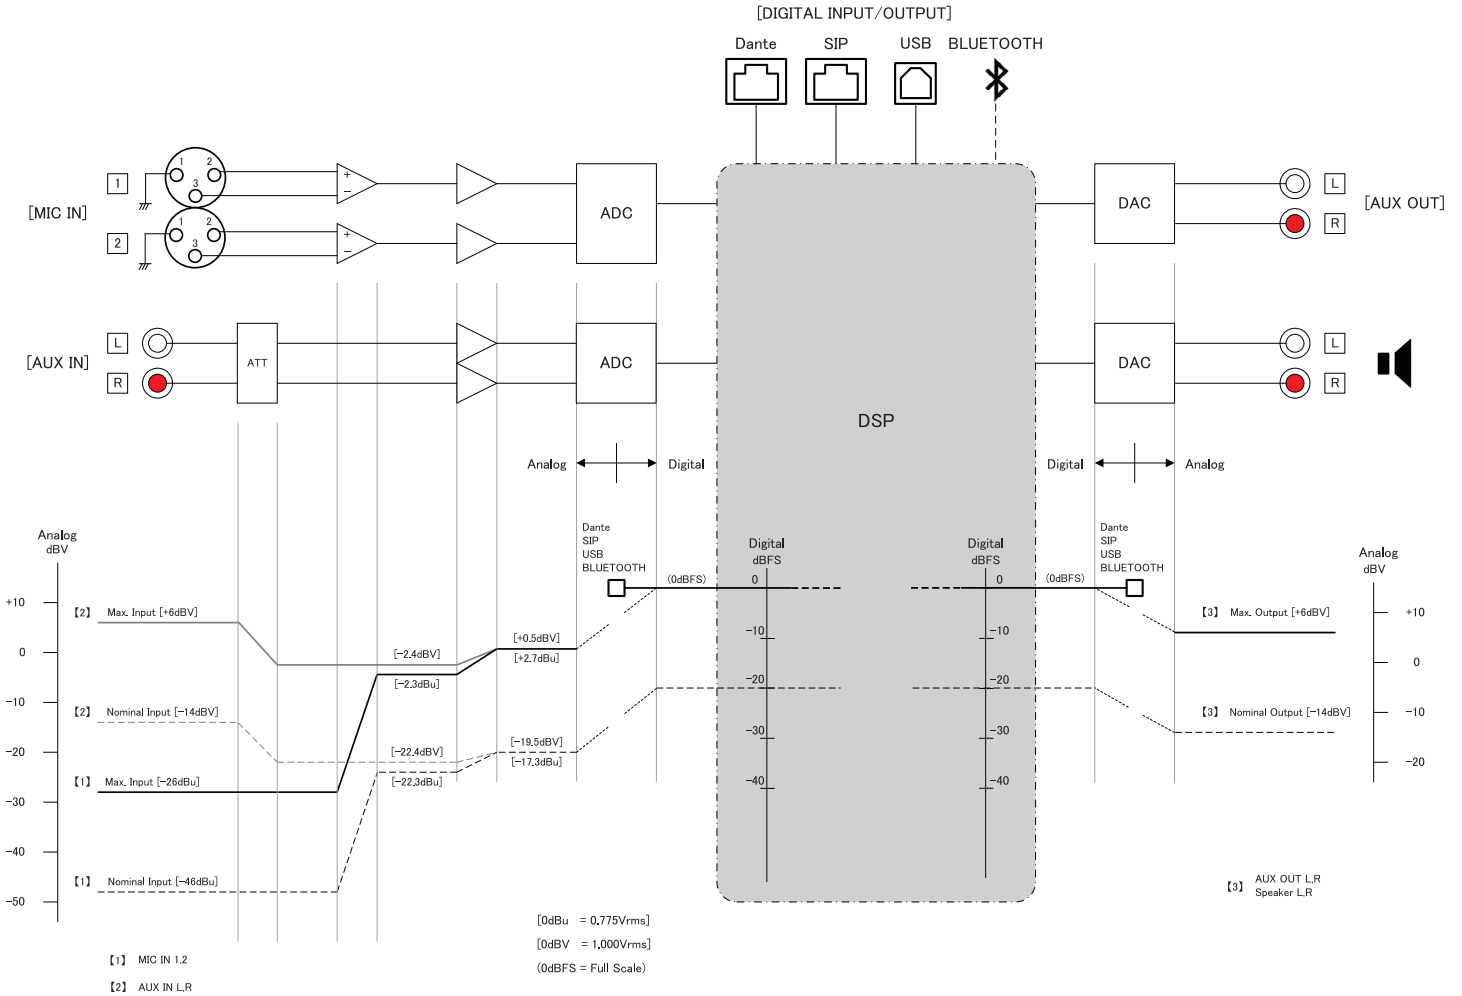

YAMAHA CORPORATION

© 2020 Yamaha Corporation. All rights reserved.  
 Product features and specifications are subject to change without notice by Yamaha.  
 All other product and company names and logos that appear in this leaflet are trademarks or registered trademarks of their respective owners.

DS-RM-CR-20201106-EN